22" Hand Sanitiser Network Android **Advertising Display**

eclipse digital



Broadcast COVID messaging and promotional content whilst providing automated hand sanitising facilities

Hand Sanitising Digital Signage

In areas where hygiene is key, and hand washing facilities are not available, these displays are ideal. They combine a hand sanitising station* with a versatile Digital Signage solution.




Contactless Usage

These displays come with a network upgrade and 1 year free subscription as standard so can be updated from our online CMS portal. They feature no external buttons or controls and have an automated on/off power timer to minimise contact following installation.







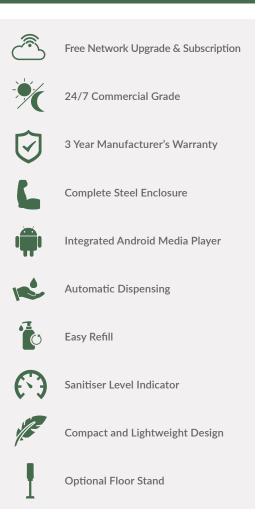



3 Year Warranty

We offer a full commercial 3 year manufacturer's warranty and free lifetime technical support, giving you complete piece of mind.



Robust Steel Enclosure

This solution features a full metal enclosure making it perfect for any commercial or public environment, especially in locations where impact is a concern.



Safe Tank Capacity

Most standard hand sanitiser stations have a capacity below one litre; this is because it reduces the risk of evaporation caused by larger tanks. This is important because as the sanitiser evaporates the alcohol content reduces – decreasing the effectiveness of the sanitiser.



Fully Automated Dispensing

The fully automated design removes the need to touch the dispenser, simply place your hand under the dispenser and a single or double dose of sanitiser will be dispensed. The dispense valve is non-spray, non-clog and can support liquid or gel.



24/7 Usage

This is a true commercial grade solution. Built using a commercial grade LCD panel and components it is designed to be in constant use.



Optional Stand Available

The display can be wall mounted as standard or mounted onto a stylish floor stand, for easy portability. The modern stand also features an illuminated blue LED strip.



Online Content Management System

Using our user-friendly cost-effective software solution you can combine multiple media zones (images, videos, webpages etc.), social media feeds, scrolling text and RSS feeds for latest news.




Safe Maintenance

The easy front access door to allows you to conveniently re-fill the sanitiser tank however to carry out maintenance on the internal components you must remove the rear panel. This two-way access ensures that no electronics are exposed when the tank is being re-filled, preventing a potential fire hazard or any damage to the display.



Key Features



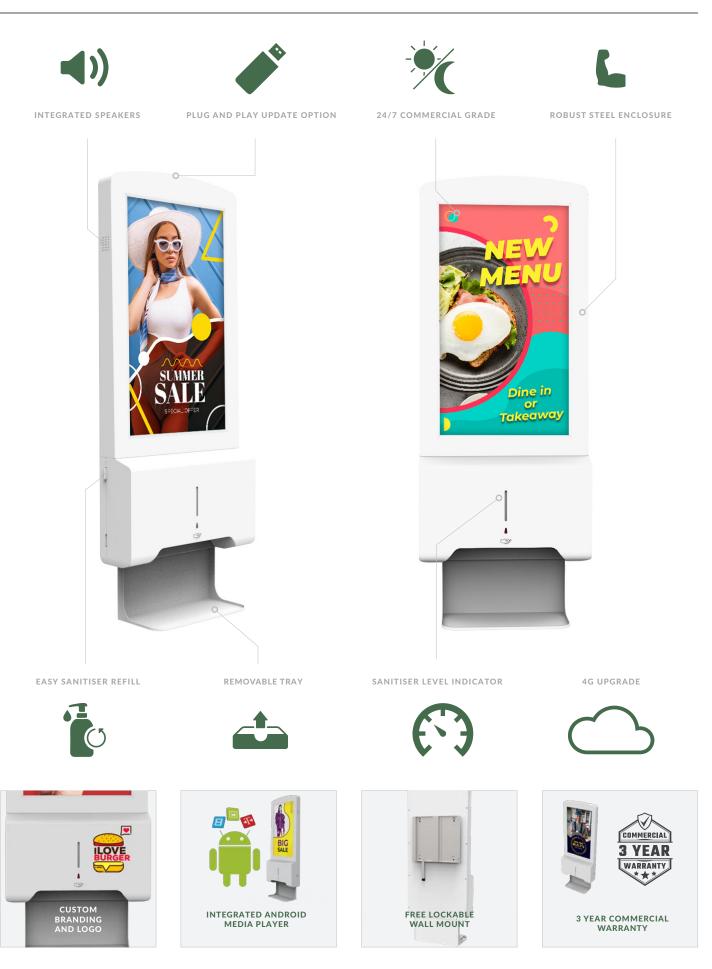

Specification Table



		22 Inch
	Resolution	1080x1920
Panel	Display Area (mm)	266.95x475.38
	Aspect Ratio	16:9
	Viewing Angle	178°
	Colour	16.7M
	Contrast Ratio	5000:1
	Brightness	450cd/m2
	Response time	5ms
	Lifespan (hours)	70,000
Audio	Built-in stereo speakers	3W x2
AV Inputs	Video	HDMI, VGA
	Audio	Audio Socket (3.5mm)
Power	Power Consumption (W)	17
	Power Input	AC110~240V (50Hz~60Hz)
Mechanical	Unit Size (WxHxD mm)	350x820x101.2
	Package Size (WxHxD mm)	435x885x181
	VESA Holes (mm)	200x200
	Net Weight (kg)	11
	Gross Weight (kg)	13
Environmental	Operating Temperature	0 °C to 50 °C
	Storage Temperature	-30°C to 60°C
	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	Internal Memory	6GB
	CPU	Quad-Core Cortex-A17@1.61GHz
	GPU	Mali-T760 MP4 @600MHz
	RAM	2GB DDR3
	ROM	8GB NAND
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	OS	Android 5.1.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
Dispenser	Capacity (ml)	700 (each dose 0.8-1)
	Sensing Distance (cm)	5
	Solution Type	Liquid or Gel
Accessories	Included	Drip Tray, Scheduling Software, Remote Control, Key, User Manual
	Optional	Floor Stand, Network Version, Touch Screen Version, 4G Upgrade
Standards	Awards	Queen's Award for Enterprise: Innovation
	Certification	CE, FCC & ROHS
	Warranty Period	3 Year Warranty
Warranty	Technical Support	Lifetime
	icennical support	Litetine





