


55" Outdoor PCAP Wall-Mounted Touch Screen Displays



PCAP Touch Screen

State-of-the-art projected capacitive technology provides the most responsive and sensitive touch experience available, as well as offering superior optical quality. Unlike other touch technologies, PCAP is not affected by dust or debris on the surface of the screen.

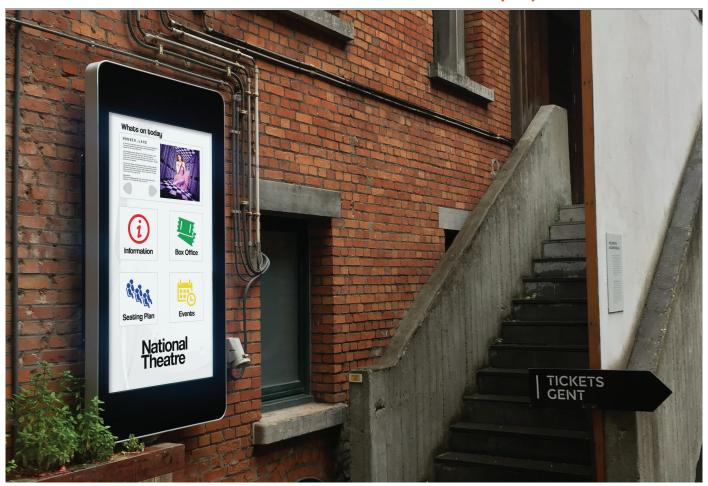



Weatherproof

Designed to withstand the elements, these displays are protected against all wet weather conditions and airborne dust particles by their robust IP65 rated enclosure. They also feature a waterproof coating on all internal circuit boards and waterproof over-moulded AV connectors.











2,500cd/m²



Vandal Proof



No Ghost Touch



Advanced Temperature Control System



Ambient Light Sensor



Anti-Reflective Glass



Free Lockable Wall Mount



24/7 Usage



Android Media Player



Customisation Available



Vandal Proof

With a mild steel enclosure and thermally-toughened glass front, these IK10 rated displays are designed to withstand any damage that may occur in public spaces. To avoid tampering, controls and inputs are hidden and cannot be accessed by passers-by.



No Ghost Touch

The electrodes that control the interactivity are sandwiched between two layers of special protective glass to prevent phantom touches. This ensures ultimate accuracy and a seamless touch experience.





Internal Locker

Should you need run the screen from an external source, there is space to fit a small PC or media player inside the lockable compartment. This can then be connected to the display via the HDMI, VGA or 3.5mm audio inputs.




Android Media Player

The display comes with a built in Android media player which can be updated using our online CMS or be used to install your own Android application.



Direct Sunlight Readable

Thanks to their commercial grade ultra-high brightness panels (2,500cd/m²), these displays are up to 10 times brighter than a domestic TV and so are easily readable even in direct sunlight.



Advanced Temperature Control System

To maximise the lifespan of the display, the internal airflow system keeps the screen running at the optimal temperature regardless of the external conditions. Built-in air conditioning can be tailored to allow the display to work in any climate.



Anti-Reflective Glass

The front glass face is specially treated to help diffuse direct sunlight, making the display easily readable even in bright weather conditions.



Customisation Available

Bespoke displays can be manufactured to order should you require a non-standard solution, to incorporate a camera for example. We can also modify existing models to add a 4G module for mobile connectivity or a vinyl logo/wrap.






4G






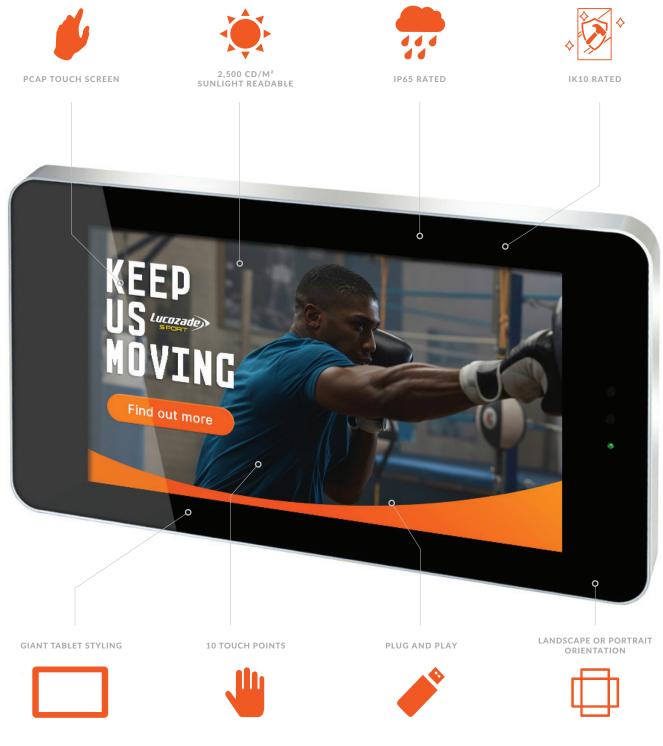











| | | 55 Inch |
|---------------|-------------------------|-----------------------------------------------------------------------------------|
| | Resolution | 1920x1080 |
| Panel | Pixel Pitch | 0.565x0.565 |
| | Display Area (mm) | 1215x686 |
| | Aspect Ratio | 16:9 |
| | Brightness (cd/m²) | 2,500 |
| | Colour | 16.7M |
| | Viewing Angle | 178° |
| | Contrast Ratio | 8000:1 |
| Touch | Touch Technology | Projected Capacitive |
| | Touch Points | 10 |
| | Glass Hardness | 7H Minimum |
| AV Inputs | Video | HDMI, VGA |
| Power | Power Consumption (W) | 430 |
| | Input Voltage | AC110~240V (50Hz~60Hz) |
| Mechanical | Unit Size (WxHxD mm) | 1637x817x145 |
| | Package Size (WxHxD mm) | 1780x1050x300 |
| | VESA Holes (mm) | 600x400/600x800 |
| | Net Weight (kg) | 100 |
| | Gross Weight (kg) | 120.5 |
| | IK Rating | IK10 |
| Environmental | Operating Temperature: | -20 °C to 50 °C |
| | Operating Humidity: | 10% - 80% |
| | Storage Temperature: | -30°C - 60°C |
| | Storage Humidity: | 5% - 90% |
| | Enclosure Protection | IP65 |
| Computer | Media Formats | Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) |
| | Media Resolution | 1920x1080/1080x1920 |
| | Internal Memory | 6GB |
| | CPU | Quad-Core Cortex-A9 @1.6GHz |
| | GPU | Mali-400 MP4 @600MHz |
| | RAM | 1GB DDR3 |
| | Internal Storage | 8GB NAND |
| | USB | USB2.0 HOST (x2) |
| | LAN | 10/100M Ethernet |
| | Wi-Fi | 802.11b/g/n |
| | OS | Android 4.2.2 |
| | Graphic Engine | OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 |
| Accessories | Included | AC Power Cable, Remote Control, Wall Mount |
| | Optional | Network Upgrade, Camera |
| Warranty | Warranty Period | 3 Year Warranty |
| | Technical Support | Lifetime |

Errors and omissions excepted



