

Samsung SMART Signage Small Display QB13R / QB13R-T Series

Enhanced communication in a compact display

Businesses no longer just need large size displays, they often also need smaller displays for a variety of environments and uses. Samsung's QB13R / QB13R-T small display enables personalized and more impactful communication through its compact and versatile design. An all-in-one solution designed for professional use, the display improves the operational efficiency of content, while also ensuring reliable performance for any business use. The QB13R-T specifically, is a touch-enabled small display which provides a unique store experience and improves customer engagement.

Highlights

- 13" FHD, non-glare display delivering clear content.
- Compact and slim design enabling efficient use of space.
- Embedded MagicINFO S player to support seamless content playback.
- Rigid 3-layered Knox security system preventing any unauthorized access.
- Center IR and built-in Wi-Fi allowing convenient remote device control and management.
- EMC Class B and IP5x rating to ensure safe and reliable operation.



Industry trend

As creating differentiated brick-and-mortar locations continues to increase in popularity, providing a unique in-store experience is critically important for elevating a brand and driving sales. Therefore, businesses are finding new and effective ways to engage customers by making the most of every customer touch point. That means small sized displays are being adapted as common tools within various environments. More personalized, intimate content can reach the right audience at optimal points in time, increasing engagement and sales opportunities. Efficient content management and reliable performance ensure businesses can operate the displays without any hassle.

Introducing Samsung Small Displays

Samsung is introducing the two latest versatile, small sized displays, the QB13R and touch-enabled QB13R-T. Designed for professional use, Samsung's QB13R Series delivers clear content using the embedded MagicINFO S media player, supported by reliable 16/7 operation and industry standard certification to ensure safe operation, reliable performance and eliminate any hassle.









QB13R : Small Display

The QB13R, FHD resolution display delivers clear and vibrant content, all in a slim and compact design. It can easily be applied to any business environment, such as a tool to display schedules, information and promotions in corporate lobbies, elevators and in front of meeting rooms and classrooms. To engage customers more directly, the QB13R can also be used as a store shelf display to promote a specific or targeted item, in addition to showing promotions at the point of sale (POS) or counter.

QB13R-T : Touch Display


With integrated capacitive touch functionality, the QB13R-T provides a user-friendly experience. Its10-point multi-touch and fast response time powers an intuitive interface that allows for customer-driven search and action. QB13R-T is optimized for any interaction opportunities such as healthcare, check-in at the gym, an automotive showroom, as well as any retail or restaurant environment where businesses would want to offer a personalized service while also acquiring customer data.





Key features



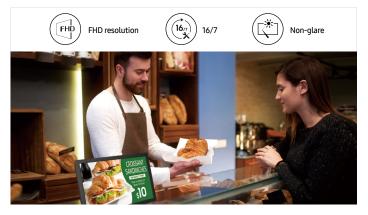

Crisp and visible content

The display supports 1920x1080 FHD resolution, displaying crisp and easy-to-read content. This is enhanced by a non-glare panel which always delivers clear content in any ambient light. These innovative features are supported by reliable 16/7 operation, suitable for professional use.




Slim, smart design

The compact and slim design of the QB13R allows for efficient space utilization, even in compact locations. A sleek back design makes the display optimal for both wall mounting or simply standing, while the connectivity, content play and device controls are easy to operate.



Powerful content playback

With an embedded MagicINFO S player, backed by TIZEN, the QB13R allows efficient and seamless playback without any external media player. SSSP also allows easy content development through reinforced compatibility with multiple web formats.

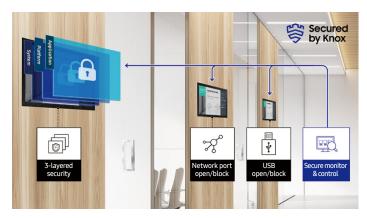

Comprehensive security setup

The powerful Knox security system provides rigid, three-layer security, offering airtight protection at the application, platform and system level, while restricting access to content and hardware. In addition, remote control of the network and USB ports prevents any unauthorized access.



Convenient, clean display control

With center IR, each display receives IR signals direct to the panel, allowing easy and convenient remote control even with a tailored installation. When mounted, display doesn't require an IR receiver cabling extension. Built-in Wi-Fi allows wireless remote management for both content and display.



Safe operation, reliable performance

The QB13R is electromagnetic compatibility (EMC) class B compliant, meeting strict safety and reliability standards for operation. Additionally, IP5x rating ensures durable performance even in dusty environments.

Specifications



	Model		QB13R	QB13R-T
	Diana 161	Class	13"	13"
	Diagonal Size	Measured	13.27"	13.27"
	Туре		Edge LED	Edge LED
	Resolution		FHD (1920 x 1080)	FHD (1920 x1080)
	Pixel Pitch (mm)		0.153 x 0.153	0.153 x 0.153
	Active Display Area		293.76 (H) x 165.24 (V)	293.76 (H) x165.24 (V)
anel	Brightness(Typ.)		300nit	300nit(w/o Glass)
	Contrast Ratio (Typ.)		800:1	600:1
	Viewing Angle(H/V)		178/178	178/178
	Response Time (G to G)		8ms(Typ.)	8ms(Typ.)
	Display Colors		16.7 M (real 6bit, dither 8bit)	16.7 M (real 6bit, dither 8bit)
	Color Gamut		45%	45%
	Operation Hour		16/7	16/7
	Haze		10%	10%
	Dynamic C/R			
			MEGA	MEGA
isplay	H-Scanning Frequency		30 ~ 81kHZ	30 ~ 81kHZ
1.7	V-Scanning Frequer		48 ~ 75HZ	48 ~ 75HZ
	Maximum Pixel Frequency		594MHz	594MHz
ound	Speaker Type		Built in Speaker(5W)	Built in Speaker(5W)
		RGB		-
		VIDEO	HDMI1.4 (1)	HDMI 1.4 (1)
	INPUT	HDCP	HDCP2.2	HDCP 2.2
		AUDIO	N/A	N/A
		USB	USB 2.0 x1	USB 2.0 x1
		RGB	N/A	N/A
onnectivity		VIDEO	N/A	N/A
	OUTPUT	AUDIO	Stereo Mini Jack	Stereo Mini Jack
		Power Out	N/A	Power Out - N/A / Touch Out - x1
		USB	N/A	N/A
	EXTERNAL CONTRO		RS232C(in) thru stereo jack, RJ45	RS232C(in) thru stereo jack, RJ45
	EXTERNAL SENSOR		N/A	N/A
	Tuner		N/A	N/A
	Туре		Adapter	Adapter
	Power Supply		AC100 - 240 V~ (+/-10 %), 50/60 Hz	AC100 - 240 V~ (+/-10 %), 50/60 Hz
		Max[W/h]	27.5	27.5
		Typical[W/h]	13	14
ower	Power Consump- tion	Rating[W/h]	25	25
		BTU(Max)	93.8	93.8
		Sleep mode	0.5	0.5
		Off mode	N/A	N/A
	Dimension(mm)	Set	322.0x193.5x28.2	322.0x193.5x29.8
	Dimension(mm)		322.0x193.5x28.2 376x132x248	322.0x193.5x29.8 376x132x248
		Set		
echanical	Dimension(mm) Weight (kg)	Set Package Set	376x132x248 0.9	376x132x248 1.1
	Weight (kg)	Set Package	376x132x248 0.9 1.7	376x132x248 1.1 2.0
	Weight (kg) VESA Mount	Set Package Set	376x132x248 0.9 1.7 100 X100	376x132x248 1.1 2.0 100 X100
	Weight (kg) VESA Mount Protection Glass	Set Package Set	376x132x248 0.9 1.7 100 X100 N/A	376x132x248 1.1 2.0 100 X100 N/A
	Weight (kg) VESA Mount Protection Glass Stand Type	Set Package Set Package	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox)	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox)
	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si	Set Package Set Package de/Bot) (mm)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat	Set Package Set Package de/Bot) (mm)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C~ 40°C	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox)
lechanical pec)peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si	Set Package Set Package de/Bot) (mm)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox) 13.1mm
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat	Set Package Set Package de/Bot) (mm)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C~ 40°C	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80%
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat Humidity	Set Package Set Package de/Bot) (mm) ture	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C~ 40°C 10~80%	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10~80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Tempera Humidity Key	Set Package Set Package de/Bot) (mm)	376x132x248 0.9 1.7 100 X 100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10~80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat Humidity	Set Package Set Package de/Bot) (mm) ture	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display , Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, WI-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Tempera Humidity Key	Set Package Set Package de/Bot) (mm) ture H/W S/W	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LCP Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10~80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting)
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Tempera Humidity Key	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play	376x132x248 1.1 2.0 100 X 100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display , Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, WI-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key	Set Package Set Package de/Bot) (mm) ture H/W S/W	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LCP Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10~80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting)
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speal er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LED Home UJ, Button Lock, Hot key option, Plug&Pl (Initial Setting) Cortex A721.7GHz Quad-Core CPU
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed	376x132x248 0.9 1.7 1.00 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Silm & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IP5x Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7/GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7/GHz	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, WI-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex 4721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed	376x132x248 0.9 1.7 1.00 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Sim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IP5x Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LEP Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10~80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speal er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LED Home UJ, Button Lock, Hot key option, Plug&Pl (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 1.2.7mm 0°C - 40°C 10°C 40°C 40°C 10°C 40°C 40°C 10°C 40°C 40°C 40°C 40°C 40°C 40°C 40°C 4	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LED Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution: 3240x2160 Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available)
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10~80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, L263, H.264/AVC, UHD H.264/AVC, C-1, HEVC, JPEG, PNG,	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IP5x Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, L263, H.264/AVC, UHD H.264/AVC, C-1, HEVC, JPEG, P
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM)	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 1.2.7mm 0°C - 40°C 10°C 40°C 40°C 10°C 40°C 40°C 10°C 40°C 40°C 40°C 40°C 40°C 40°C 40°C 4	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C - 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1/h, JPS Rating, W-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 4818, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MEGE-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, P VP8, VP9 * Audio Decoder: AC3 (DD), MPEG
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 1.00 X100 N/A Bar Type Simple Stand (Inbox) 1.2.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.25GB, LPDDR41.5GHz 64bit Graphic resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MFEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG USB 2.0	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz Abit Graphic resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MFEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, P VPB, VP9 *Audio Decoder : ACS (DD), MPEG USB 2.0
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W)	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Muttimedia	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution: 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-T/2/4, H2AS, H2A4/AVC, UHD H264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux)	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UL, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A72.1.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution: 3540x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H2AS, H2A4/AVC, UHD H264/AVC, VC-1, HEVC, JPEG, P USB 2.0 Tizen 4.0 (VDLinux)
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7CHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8/GB (3.88GB Occupied by 0/S, 412CB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VPB, VPP *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP d 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP d Temperature Sensor, Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spead er(SW1ch), IPSx Rating, Wi-F, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 412GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, P USB 2.0 Tizen 4.0 (VDLinux) 60950-1
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat Humidity Key Special Internal Player (Embedded H/W) Safety EMC	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 1.00 X100 N/A Bar Type Simple Stand (Inbox) 1.2,2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1Ch), IPSx Rating, Wi-Fri Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex X7217(Fdz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 17GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.83GB Occupied by 0/S, 412GB Available) *Video Decoder : MPEG-172, H.263, H.264,AVC, UHD H.264,AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B	376x132x248 1.1 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Spea er(SW16), IPSx Bating, Wi-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex X7217/GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR4 1.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-1/24, HzA3, HZ4/AVC, UHD HZ4/AVC, VC-1, HEVC, JPEG, P VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7CHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8/GB (3.88GB Occupied by 0/S, 412CB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PNG, VPB, VPP *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor, Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-F, IO Point Touch(Max) Auto Source Switching & Recovery, LFD Home UL, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, P USB 2.0 Tizen 4.0 (VDLinux) 60950-1
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety EMC Environment	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution: 3840x2160 (Sciel up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H2A3, H2A4/AVC, UHD H264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Type	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Spea er(SW1ch), IPSx Rating, Wi-F, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex A72.1.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 7920x1080 Output resolution: 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H2A3, H2A4/AVC, UHD H2A4/AVC, VC-1, HEVC, JPEG, P VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Typ
peration	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperat Humidity Key Special Internal Player (Embedded H/W) Safety EMC	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports Operating System	376x132x248 0.9 1.7 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex X7217/614 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 17/GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920X1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 86B (3.86G BOccupied by 0/S, 412GB Available) *Video Decoder : MPEG-1724, H263, H224/AVC, UHD H224/AVC, UC-1, HEVC, JPEG, PNG, USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Controller, Batteries, BarType Simple Stand	376x132x248 11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speater (MTA), JPS Rating, W-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&P (Initial Setting) Cortex X72.17642 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8BG 13.86G Cocupied by 0/S, 4.12GB Available) *Video Decoder : MPEG-1724, H226, H224/AVC, UHD H224/AVC, UC+1, HEVC, JPEG, P VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizren 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Typ Simple Stand, USB Cable
pec peration eature ertification	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety EMC Environment	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports	376x132x248 0.9 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(5W1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution: 3840x2160 (Sciel up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/2/4, H2A3, H2A4/AVC, UHD H264/AVC, VC-1, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Type	11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speal er (SW1ch), IPSx Rating, WI-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&PI (Initial Setting) Cortex A72.17GH2 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 3240x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by 0/S, 4.12CB Available) *Video Decoder : MPEG-1/2/4, H2A3, H2A4/AVC, UHD H.264/AVC, VC-1, HEVC, JPEG, PI USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Typ
peration eature ertification	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety EMC Environment Included	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Multimedia IO Ports Operating System	376x132x248 0.9 1.7 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex X7217/614 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 17/GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920X1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 86B (3.86G BOccupied by 0/S, 412GB Available) *Video Decoder : MPEG-1724, H263, H224/AVC, UHD H224/AVC, UC-1, HEVC, JPEG, PNG, USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Controller, Batteries, BarType Simple Stand	376x132x248 11 2.0 100 X100 N/A Bar Type Simple Stand (Inbox) 13.1mm 0°C- 40°C 10-80% Small Touch Signage Display, Slim & Light Signage with Built-in MagicInfo 56, SSSP 6 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speal er(SW1/61, JPS Rating, W-F; 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Pl (Initial Setting) Cortex X72.17CH2 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 86B (3.8663 Ccupied by 0/S, 412CB Available) *Video Decoder : MPEG-172/4, L426, H224/AVC, UHD H224/AVC, UC+1, HEVC, JPEG, Pl USB 2.0 VP8, VP9 *Audio Decoder: AC3 (DD), MPEG USB 2.0 Tizren 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Typ Simple Stand, USB Cable
pec	Weight (kg) VESA Mount Protection Glass Stand Type Bezel Width (Top/Si Operating Temperal Humidity Key Special Internal Player (Embedded H/W) Safety EMC Environment	Set Package Set Package de/Bot) (mm) ture H/W S/W Processor On-Chip Cache Memory Clock Speed Main Memory Interface Graphics Storage (FDM) Muttimedia IO Ports Operating System	376x132x248 0.9 1.7 1.7 100 X100 N/A Bar Type Simple Stand (Inbox) 12.2mm 0°C- 40°C 10-80% Small Signage Display, Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0 Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak- er(SW1Ch), IPSx Rating, Wi-Fi Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Cortex X7217/614 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 17/GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920X1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 86B (3.86G BOccupied by 0/S, 412GB Available) *Video Decoder : MPEG-1724, H263, H224/AVC, UHD H224/AVC, UC-1, HEVC, JPEG, PNG, USB 2.0 Tizen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Controller, Batteries, BarType Simple Stand	376x132x248 1.1 2.0 1.00 X100 N/A Bar Type Simple Stand (Inbox) 1.3.1mm 0°C- 40°C 10-80% Small Touch Signage Display , Slim & Light Signage with Built-in MagicInfo 56, SSSP 6. Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speak er(SW1/A), JPSx Rating, W-Fi, 10 Point Touch(Max) Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Pl (Initial Setting) Cortex X721764 Quad-Core CPU L1 Instruction Cache : 48KB, L1 Data Cache : 32KB, L2 Cache : 2MB 1.7GHz 2.5GB, LPDDR41.5GHz 64bit Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available) *Video Decoder : MPEG-1/24, L42SA, L4264AVC, UHD H2 AZ64AVC, U-C1, HEVC, JPEG, PP USB 2.0 Tizzen 4.0 (VDLinux) 60950-1 Class B ENERGY STAR 8.0, Epeat Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries, Bar Type Simple Stand, USB Cable

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

SMART Signage

For more information about Samsung SMART Signage QB13R, QB13R-T Series Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2020 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.

416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea

2020-01