

Display any content in ultra-high definition with incredibly rich color on slim, efficient signage

Through intelligent UHD upscaling technology, Samsung's QMR and QMT series performs edge restoration and noise reduction to deliver UHD picture quality even with lower resolution content. As an added benefit, this series also features reliable, non-glare panels that provide better visibility from all angles. Backed by Tizen 4.0, this series provides reinforced capability with multiple web formats and secured protection. Additionally, its new slim design simplifies wall mounting and ensures seamless installation.


Highlights

- Engage customers with lifelike images through ultra high-definition resolution
- Deliver UHD-level picture quality even with lower resolution content through Crystal Processor 4K supporting advanced UHD upscaling technology
- Dynamic Crystal Display allows viewers to enjoy a wider spectrum of colors, up to one billion shades
- Symmetrical, slim design simplifies installation and complements any environment
- Secure, PC-free operation through Knox and rigid three-layer protection
- Reliable, non-glare panels provide better visibility from all angles, anytime of day allowing businesses to deliver accurate information 24/7



Industry trend

With visual display technology continually improving, viewers have developed an ever-growing expectation for better – and bigger – picture quality. Users, more than ever, want to captivate customers with truly lifelike images and gain a competitive edge over their industry peers with best-in-class displays. This is reflected in the fact that UHD resolution continues to grow in popularity, becoming an essential way for brands to impress customers amid a wider variety of stunning, aesthetical visuals and content. This trend is coupled with demand for larger screen sizes, particularly in the 75-inch and above category, enabling businesses to differentiate themselves and display content in a more impactful way than ever before.

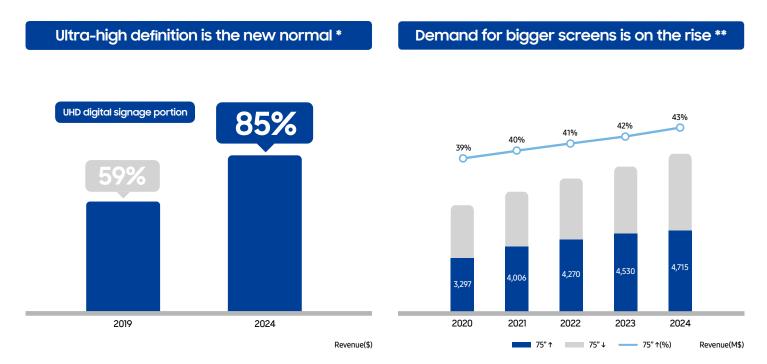

*,** Source : Omdia, Public Displays Market Tracker Q1 2020, July 2020. Revenues in USD Millions. Does Not Include Consumer TVs Used as Public Displays. Not an Endorsement of Samsung Electronics Co. Ltd. Any Reliance on these results is at the third-party's own risk.

Why Samsung's QMR series?

Samsung's superior visual display technology has positioned them as the industry leader in the digital signage market for a decade* and Samsung brand having been No.1 in sales for 11 consecutive years in the display market**. As an expert in picture quality in the display industry, Samsung is able to deliver best-in-class picture quality through their QMR and QMT series. The signage provides rich and flawless colors, sleek and durable design, powerful performance through SSSP 6 and secured protection. Samsung's QMR and QMT series is also able to upscale the low resolution content to UHD picture quality. For commercial displays, this technology advancement means highly visible signage with unmatched accuracy to help capture the attention of potential customers. It also means savings both in cost and time for businesses who can produce content more inexpensively at a lower resolution and still display it in stunning UHD quality.

* Results based on Omdia(former IHS) report "Public Displays Market Tracker", 2009 – 2018. Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk.

^{**} According to market research company "Omdia". Ranking in terms of shipments. Results are not an endorsement of Samsung. Any reliance on these results is at the third-party's own risk.










Key features



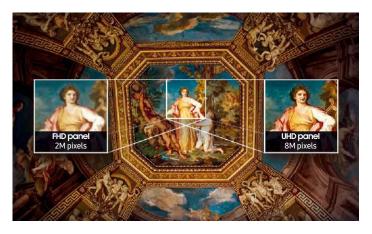




Incredible 4K picture quality

Samsung's new QMR and QMT series is able to capture customer attention by providing an incredibly clear picture, showcasing lifelike images and intricate details better than ever before thanks to ultra high-definition 4K resolution.

Perfect view with non-glare display

When clear visibility is essential, the QMR and QMT series incorporates key features including up to 500 nit brightness and reliable, non-glare panels that provide better visibility from all angles, anytime of day. The display is ideal for locations such as airports and commuter stations where 24/7 access to clear and accurate information is crucial.

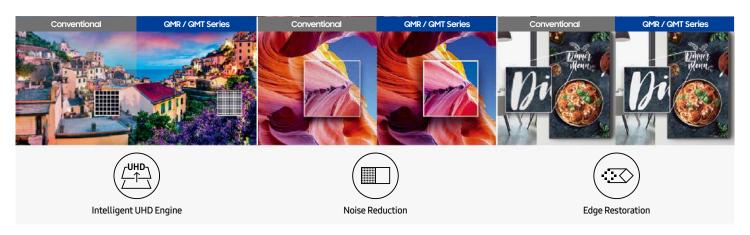

Crystal Processor 4K

Samsung's global leadership in display technology and picture quality spans more than a decade. Thanks to superior semi-conductor technology, Samsung has developed the powerful video processor available. Additionally, intelligent UHD upscaling technology is a cutting-edge solution based on Samsung's proprietary UHD Processor that allows content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to optimize on-screen text and imagery with crisp edges and fine detail.



Dynamic Crystal Display

Dynamic Crystal Display is what brings the incredible, lifelike color to Samsung displays. Using 10-bit processing, the displays are able to showcase a wider spectrum of colors — up to a billion different shades — capturing subtle differences for flawless color expression, critical to businesses in ensuring brand consistency across communication channels. The QBR and QBT series also features HDR+ functionality that converts standard definition (SDR) content to HDR quality for sharper contrast and more vivid colors.

Key features





Slim and symmetrical design

The all-new slim and symmetrical design of the QMR and QMT series significantly simplifies wall mounting the display and ensures installation is a seamless process. The display's power inlet direction has been redesigned to sit flush against the wall. The new design sets guarantees a long life cycle ensuring the QMR and QMT series will stand the test of time.



Samsung Workspace secured by Knox

Samsung Workspace is a powerful new feature fortified by proprietary Knox security technology allowing users to create an enhanced virtual collaboration workspace without needing a PC in the room, or any physical connection. Simply connect a keyboard and mouse to the display and immediately get to work accessing a PC remotely or web based cloud services such as Microsoft Office 365 and VMWare Horizon.


- * Samsung Workspace feature support may vary by region and market conditions.
- * The scheduled availability of this feature varies by model



Wi-Fi and Bluetooth built-in

The QMR and QMT series features a nearly endless range of business use cases thanks to built-in Wi-Fi and Bluetooth. Wireless connectivity allows for personalized and interactive services including enabling integration with beacon technology in store, while also simplifying how businesses showcase content.

* Image is for illustrative purposes only, specific application or program may have to be developed for the depicted usage scenario.

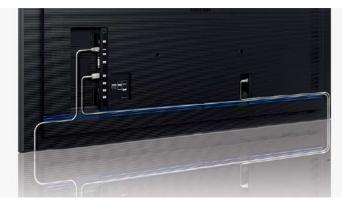

Clean cable management

In a corporate or retail environment, the back of a display is often visible to customers. With the QMR and QMT series' new cable guide feature retailers can tuck messy cables away from view. This allows for a clean and more visually-appealing customer shopping experience.



Powerful, all-in-one solution

The Samsung SMART Signage Platform (SSSP) is an open-source, all-in-one solution embedded in Samsung SMART signage that simplifies installation and maintenance. With SSSP, there is no need for any external devices to communicate with the server or play digital media enjoying easy development, reinforced capability with multiple web formats, and secured protection.



Industry standard certified

QMR displays are EMC class B compliant, providing a safe and healthy viewing environment by meeting strict standards of electromagnetic wave emission and assuring reliable operation even near other electronic equipment. The displays are also registered by EPEAT, the global ecolabel for IT, confirming the hardware is sustainable for the full product lifecycle, from design and production to energy use and recycling.

* QM85R and QM98T have EMC class A certification and not registered by EPEAT.

Specifications



Special H/W Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.24EA, HDCP1.47EA), IPSx Rating, WF-IPST		Model		QM43R	QM50R	QM55R	QM65R	QM75R
Part		Diagonal Sizo	Class	43	50	55	65	75
Residency		Diagonal Size	Measured	42.5	49.5	54.6	64.5	74.5
Part Martin Mar		Туре		Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU
According to proceed Page		Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)
Part	Panel	Pixel Pitch (mm)		0.2451 x 0.2451	0.285 x 0.285	0.315 x 0.315	0.372 x 0.372	0.42975 x 0.42975
Content Cont		Active Display Area		941.184 (H) x 529.416 (V)	1095.84(H) x 616.41(V)	1209.6(H) x 680.4(V)	1428.48 (H) x 803.52 (V)	1650.24 (H) x 928.26 (V)
Nonething Content Cont		Brightness(Typ.)		500	500	500	500	500
Response Free Clinical Security Se		Contrast Ratio (Typ.)		4000:1	4000:1	4000:1	4000:1	4000:1
Control colors		Viewing Angle(H/V)		178/178	178/178	178/178	178/178	178/178
Continue 100000000000000000000000000000000000				8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)
Control State		Display Colors						16.7M(True Display)
Special Coloration Special								1.07B(Ditherd 10bit)
Marco								92% (DCI-P3, CIE1976)
Depart Processor Process								24/7
Microsent presument Microsent present Microsent presument Microsent presument Microsent present Microsent presument Microsent presument Microsent present Microsent presument Microsent present Microsent presen								44%
Machaman	Display							MEGA
Macrosophic								30 ~ 81kHZ
Special Color Special Colo								48 ~ 75HZ
March Michael Dist Display Pert 2(1)								594MHz
MORTO	Sound							Built in Speaker(10W+10W)
MPUT								DVI-D, Display Port 1.2 (1)
Mail								HDMI 2.0 (2)
Mill		INPUT	HDCP					HDCP2.2
Connecticity Part		ОИТРИТ	AUDIO					Stereo mini Jack, DVI, HDMI/Audio(Common)
Month Mont			USB					USB 2.0 x 2
WIRD NA								HDMI 2.0 (Loop-out)
OUTPOIL ALDO Series Medicals Series Medicals Series Medicals Series Medicals Series Medicals Series Medicals N.A. N.A. N.A. N.A. N.A. N.A. N.A. N.	Connectivity							N/A
Prover Out USB								Stereo Mini Jack
DETERNAL CORTION DETERNAL SOLISOR NA NA NA NA NA NA NA N								N/A
DITEMAL SCHISOR R								N/A
DETERNAL SENCIAL NA		EXTERNAL CONTROL						RS232C(in/out) thru stereo jack, RJ45
Timer								IR
Type								N/A
Power Consumption MacDiff 100								
								Internal
Power Consumption File		PowerSupply	N D1/43					AC100 - 240 V, 50/60 Hz
Power Consumption Powe								231
Profession BTUM-bard Step mode 0.5	Power	Power Consumption						178
Secondary Secondary Secondary								210 787.7
Dimension/mmm Set								0.5
Dimensionfrimm Set 967.5 x 5577 x 48.3 1121.4 x 643.9 x 46.3 1235 1 x 7079 x 46.3 145.3 9 x 831.0 x 46.3 129.0 x 84.5 140 x 85.5 x 16.1 18.1 24.9 18.4 24.9 13.3 17.6 25.6 33.3 33.3 24.0 24.0 24.0 24.0 24.0 25.0 33.3 24.0 24								N/A
Dimersion(mm) Package 1095 x 676 x 151 1289 x 784 x 152 1407 x 858 x 163 1611 x 973 x 185 1299 1290 x 200 133 176 23.5 33.3 3.3 176 23.5 33.3 3.3 176 23.5 33.3 3.3 176 23.5 23.5 33.3 3.3 176 23.5 23.5 23.3 23.3 23.0 23.0 x 200 20.0 x 200 20.0 x 200 20.0 x 200 20.0 x 200 40.0 x 400 x								1681.1 x 960.1 x 49.7
Vector V		Dimension(mm)						
Mechanical Weight (log) Package 13.3 17.6 23.6 33.3 3.3 Mechanical VESM Mount			-					1871 x1127 x 223
VESA Mount		Weight (kg)						38.3 49
Protection Glass								
Stand Type								400 x 400
Diperation Diperating Dip		Stand Type						N/A
Peration Operating Temperature								No
Name								11.5mm(U/L/R),12.5mm(B)
New Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, SSSP 6.0 Seatery (1680 host) Sim a Light Signage with Bulls in Magicinfo 56, S	Operation	ration						0°C~ 40°C
Sim & Light Signage with Bull-this Majalinfo 56, 555P AD Bull-this Maj		Humidity						10~80%
Built-in MagicInfo Sc, SSSP 6.0 Emperature Sensor)Pivo Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(1000 Zh), Video Wall Daisy Chair(HDCP2 246.4 HDCP1 4776.4), IPSx Rating, Wi-Fi/BT Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug RPay (Initial Setting) Concert A721/76Hz Quad-Core CPU On-Chip Cache Home UI, Button Lock, Hot key option, Plug RPay (Initial Setting) Cortex A721/76Hz Quad-Core CPU On-Chip Cache Home UI, Button Lock, Hot key option, Plug RPay (Initial Setting) Cortex A721/76Hz Quad-Core CPU On-Chip Cache Home UI, Button Lock, Hot key option, Plug RPay (Initial Setting) Cortex A721/76Hz Quad-Core CPU On-Chip Cache Home UI, Button Lock, Hot key option, Plug RPay (Initial Setting) Cortex A721/76Hz Quad-Core CPU Cortex A7	Feature	Key					Slim & Light Signage with	UHD Signage Display Slim & Light Signage with
Format F		Special	H/W	Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x	Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x	Temperature Sensor, Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA,HDCP1.4:7EA), IP5x	Temperature Sensor, Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Speaker (10W2ch), Video Wall Daisy Chain (HDCP2.2:4EA, HDCP1.4:7EA), IP5x	Built-in MagicInfo S6, SSSP 6.0 Temperature SensorPivot Display, Cloc Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), Video Wall Daisy Chain(HDCP2.2:4EA, HDCP1.4:7EA), IPS Rating, Wi-Fi/BT
Cache			Processor	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting) Coretex A721.7GHz Quad-Core CPU	Auto Source Switching & Recovery, LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting) Coretex A721.7GHz Quad-Core CPU
Teature			Cache	L1 Data Cache : 32KB	L1 Data Cache : 32KB	L1 Data Cache : 32KB	L1 Data Cache : 32KB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB
Main Memory 2.5GB LPDDR41.5GHz 64bit Graphic resolution :1920x1080 Unturesolution :3840x2160 (Scale up from graphic processing result.) Storage (FDM) 412GB Available) 4			-					L2 Cache : 2MB 1.7GHz
Interface								2.5GB
Internal Player (Embedded H/W)								LPDDR41.5GHz 64bit
Multimedia				Output resolution : 3840x2160 (Scale up from graphic processing result.)	Output resolution: 3840x2160 (Scale up from graphic processing result.)	Output resolution: 3840x2160 (Scale up from graphic processing result.)	Output resolution : 3840x2160 (Scale up from graphic processing result.)	Graphic resolution: 1920x1080 Output resolution: 3840x2160 (Scale ufrom graphic processing result.) 8GB (3.88GB Occupied by O/S,
Audio Decoder: AC3 (DD), MPEG			(FDM)	4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+,	4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+,	4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+,	4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+,	4.12GB Available) *Video Decoder : MPEG-1/2/4, H.263
System S				*Audio Decoder : AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG USB 2.0
Safety 60950-1 60950-1 60950-1 60950-1 60950-1 EMC Class B Class B Class B Class B Class B Environment ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat				Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
EMC Class B Class B Class B Class B Class B Entification Environment ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat				60950-1	60950-1		60950-1	60950-1
ertification Environment ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat ENERGY STAR 8.0, Epeat	Certification							Class B
ENERGY STAR 6.0, Epeal ENERGY STAR 6.0, Epeal ENERGY STAR 6.0, Epeal								
8021v(WPA2 Enterprise) 8021v(WPA2 Enterprise) 9021v(WPA2 Enterprise) 9021v(WPA2 Enterprise)				ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)
Security Suc.IXWPAZ Enterprise) 80Z.IXWPAZ En		Security						: EAP-TLS, EAP-TTLS, EAP-PEAP
Quick Setup Guide, Warranty Card, Quick Setup Guide, Warranty Card, Quick Setup Guide, Warranty Card,	Accessories	Included		Quick Setup Guide, Warranty Card,	Quick Setup Guide, Warranty Card,	Quick Setup Guide, Warranty Card,	Quick Setup Guide, Warranty Card,	Quick Setup Guide, Warranty Card,
Power Cord, Remote Controller, Batteries Power Cord, Remote Cord, Remote Cord,		Stand						
control								No WMN4277SE (Land Only)
Optional Mount WMN4070SE (Land Only) WMN4070SE (Land Only) WMN4070SE (Land Only) WMN4277SE (Land Only)		Optional	Mount	WMN4070SE (Land Only)	WMN4070SE (Land Only)	WMN4070SE (Land Only)	WMN4277SE (Land Only)	WMN6575SE
Specialty CML400XK CML400XK CML400XK CLM450K				CML400XK	CML400XK	CML400XK	CLM450K	CLM450K
Media Player N/A N/A N/A N/A			Media Player	N/A	N/A	N/A	N/A	N/A