



Interactive touch solution with open frame and integrated Windows options available; ideal for kiosk integration or wall-mounted applications


Optional Integrated Windows PC

Easily transform this solution from an interactive touch monitor into a fully integrated all-in-one Windows touch screen simply by inserting an OPS PC into the built-in slot, with no cables required. To prevent theft or damage, this can be secured with a hex security screw.



Open Frame Option

These open frame touch screen monitors are ideal for system integrators. With an underside mounting bracket included at no extra cost, this flexible solution can be mounted into any kiosk, table or cabinet in any direction or orientation. The bracket also features micro-adjustment in all three directions to enable flush-fit surface integration. Alternatively, these monitors can be wall or stand mounted thanks to their complete enclosure.

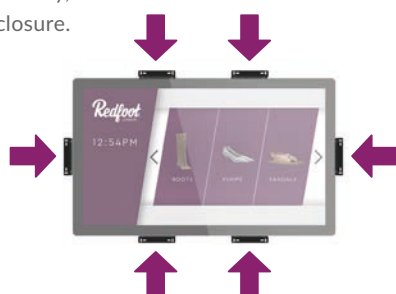

Connect External Devices



24/7 Commercial Grade



10-Point PCAP Touch



500cd/m² IPS Panel



Open Frame Mounting Bracket



Surface Plasma Treatment




Integrated Speakers



3 Year Commercial Warranty

Attach External Devices

Connect these versatile touch screen monitors to an external source, such as a third-party PC or media player, using the HDMI and USB inputs to run any software desired.

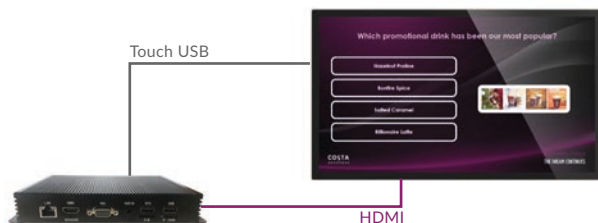

24/7 Commercial Use

These monitors are designed for continuous use in public spaces, able to be used 24/7 for over 70,000 hours. Built using true commercial grade components and having undergone rigorous quality control testing, they offer a reliable and cost-effective solution.



Giant Tablet Styling

A stylish edge-to-edge glass face, rounded corners, aluminium surround with unique concave indent profile, and thin black border deliver a captivating tablet-like aesthetic. The protective tempered glass face and mild steel enclosure also increase the durability of the display, protecting the LCD panel and other internal components from potential damage in public spaces.



Integrated Speakers

For applications that require an audio element, these monitors feature two integrated slimline speakers.

8W, 3Ω x 2
Integrated Speakers



Ultra Responsive Interactivity

Optimum sensitivity to touch gestures and rapid response times ensure that users have a smooth, effortless experience. There's no need to touch the same thing multiple times or wait for a touch to register when interacting with these ultra-responsive displays.



500cd/m² IPS Panel

With a brightness of 500cd/m², these monitors are ideal for brightly-lit public spaces. Plus, commercial grade IPS technology ensures accurate image quality and colour depth with no fall-off in colour accuracy, as well as achieving ultimate lifelike colour temperature in both landscape and portrait orientation.



Surface Plasma Treatment

A special oleophobic coating makes the glass front more resistant to the oily residue left by fingerprints, as well as improving the smoothness of touch gestures. Unlike some other touch screens, this glass is not etched and this vastly enhances the optical clarity.




PCAP Touch Technology

Industry-leading PCAP technology delivers a seamless touch experience, with sleek edge-to-edge glass, superior optical quality and up to ten touch points. Not only does this allow users to perform a variety of touch gestures, including manipulating images and zooming in/out, it also allows multiple users to interact with the touch screen at once.

10
Touch Points



Key Features



OPS PC SLOT



24/7 COMMERCIAL USE



INTEGRATED SPEAKERS



550CD/M² BRIGHTNESS



LANDSCAPE OR PORTRAIT
ORIENTATION



MICRO ADJUSTMENT
OPEN FRAME BRACKET




TOUGHENED FRONT GLASS



CONNECT EXTERNAL DEVICES



OPTIONAL WINDOWS
OPS PC



OPEN FRAME
MOUNTING BRACKET



SURFACE PLASMA
TREATMENT



GIANT TABLET STYLING

Specification Table

| | | 50 Inch |
|---------------|---------------------------------|---|
| Panel | Resolution | 3840x2160 |
| | Display Area (mm) | 1075.8x606 |
| | Aspect Ratio | 16:9 |
| | Brightness (cd/m ²) | 500 |
| | Colour | 16.7M |
| | Viewing Angle | 178° |
| | Contrast Ratio | 1,000:1 |
| Touch | Touch Technology | Projected Capacitive |
| | Touch Points | 10 |
| | Glass Hardness | 7H minimum |
| Audio | Speaker Type | 3W (x2) |
| AV Inputs | Inputs | HDMI |
| Power | Power Consumption (W) | 55 |
| | Input Voltage | AC220V |
| Mechanical | Unit Size (WxHxD mm) | 1135.2x665.4x62.7 |
| | OPS PC Specification | 200x119x30 (OPS) |
| | Package Size (WxHxD mm) | 1235x765x162 |
| | VESA Holes (mm) | 400x400 |
| | Net Weight (kg) | 30 |
| | Gross Weight (kg) | 32 |
| Environmental | Operating Temperature | 0 °C to 40 °C |
| | Storage Temperature | -20°C to 60°C |
| | Operating Humidity | 20% to 80% |
| | Storage Humidity | 10% to 90% |
| Accessories | Included | Open Frame Mounting Bracket, Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial |
| | Optional | Windows Slot-in OPS PC, Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand |
| Warranty | Warranty Period | 3 Year Warranty |
| | Technical Support | Lifetime |

Errors and omissions excepted



